

TB 100-C

**CIPPATORE CINGOLATO
(WPER RAMI FINO A 9 CM)**

**TRACKED WOOD CHIPPER
(FOR BRANCHES UP TO 9 CM)**

VIDEO 



Caratteristiche

- Cippatura rami fino a 10cm di diametro.
- Capacità oraria: 5-10m³/ora a seconda del prodotto tritato.
- Azionamento con motore a scoppio.
- Nr.2 Lame cippatura reversibili.
- Robusto gruppo di taglio a tamburo.
- Facile spostamento su cingoli e motore indipendente.
- Triturazione potatura secca o fresca, fasci di rami e foglie di palma.
- Grandezza cippato da 1 a 2 cm
- Puleggia centrifuga per facilitare l'avviamento.
- Per manutentori del verde pubblico e aziende agricole.

Features

- Branches cut up to 10 cm in diameter.
- Hourly capacity: 5-10 m³/hour depending on the material.
- Powered by a petrol engine.
- 2 reversible chipping blades.
- Sturdy drum cutting unit.
- Easy move on tracks with petrol engine.
- Dry or fresh pruning cut, bundles of branches, and palm leaves.
- Chip size from 1 to 2 cm.
- Centrifugal pulley for easy engine start.
- For municipality maintenance, contractors and farms.



MODIFICATA IN TB100-C LA SCRITTA
SOPRA LA MACCHINA LA FOTO È
DELLA TB100


MODELLO MODEL			
	(CM)	(HP-KW)	Nr.
TB 100 - C (Cingolato-Tracks)	9	18 / 3,5 - 13 / 2,6	2



COMPONENTI TECNICHE DI SERIE TECHNICAL COMPONENTS STANDARD



3 marce + retromarcia.
3 gear + reverse.



Tamburo cippatore
(300 mm x 150 mm).
Chipping drum
(300 mm x 150 mm).



Curva di scarico orientabile
a 360°.
360° adjustable outlet
elbow.





Pianale porta attrezzi
(portata 350 kg).
Tool platform
(capacity 350 kg).



LAME STANDARD STANDARD BLADES

Lama Reversibile fissata con viti a testa esagonale + controlama.
Reversible blade fixed with hexagonal head screws + counter-blade.

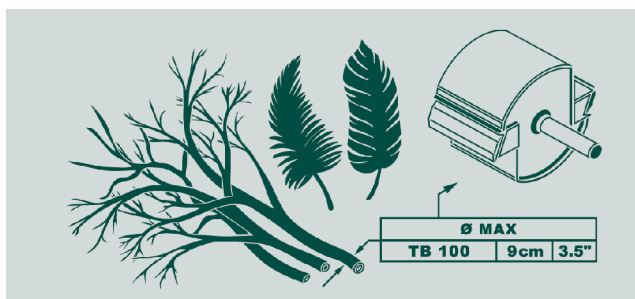

MODELLO MODEL	 (KG)	 (LxPxH)	 (LxPxH)
TB 100 - C (Cingolato-Tracks)	350	2160 x 695 x 1710	1600 x 800 x 1800