

## Profi geared cable winches Technical details at a glance:

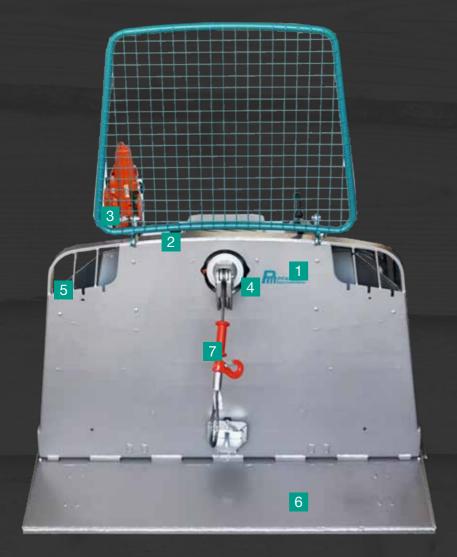

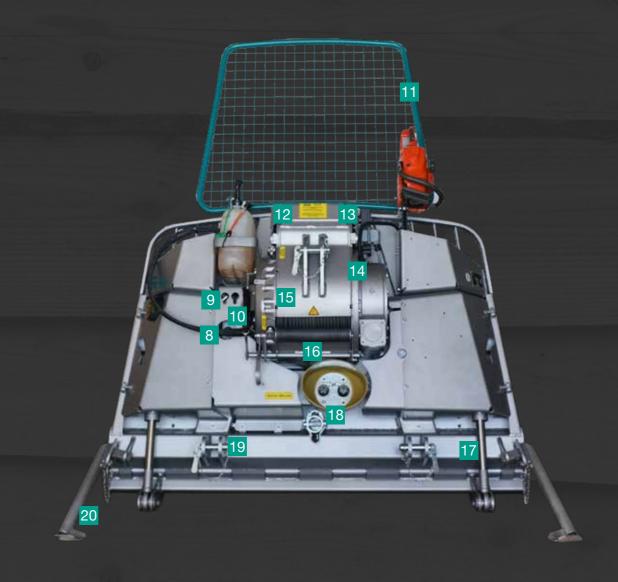

The PHS system enables short reaction times and fast working due to a permanent hydraulic pres-

dard with a Forestry radio system.

useful and keep order on the tractor.

- Constructed of fine-grained steels, the sturdy shield is torsionally stiff and provides support if there is lateral pull.
- All Pfanzelt cable winches are equipped as stan-
  - Optimum protection against hand crushing in the event of operating errors is provided by the TUTUM crush protection pro.
  - The hydraulic pressure can be checked quickly and easily on the standard pressure gauge.
- The cable infeed reel with ball bearings guarantees cross pulls up to 90°. The low position saves a deflection roller.

Two holders for fuel canister and chainsaw are

- The optionally available Load lowering valve allows the brake to be released in a controlled manner (optionally also by radio).
- Two **storage compartments** mounted on the side With the Vario-Zug option, the maximum pulling of the winch plate ensure order and are easy to force can be adjusted to the given operating conreach.

- The large and sturdy safety grille provides safety for the operator and protects the tractor from damage.
- The optionally available pressure roller improves cable distribution across the drum width on wide

As an option, the forwarding shield can be supplied

hydraulically foldable, which increases ground

An optionally available cable payout facilitates the cable pullout and reduces cable wear.

Various cable distribution systems guarantee per-

A reversing gear is available as an option. With this

the winch can also be mounted at the front.

The standard PPS controller allows easy adjustment of the overlap of clutch and brake.

fect cable distribution and low wear.

- Different mounting options for different categories of lower links allow an uncomplicated attach-
- The wide cable drum creates space for long cable lengths and minimises the loss of traction to a maximum of 28 per cent.
- Lateral stand legs facilitate mounting and dismounting of the winch and secure the operator.